


4" and larger wells - continued

SP 10S (10 gpm)

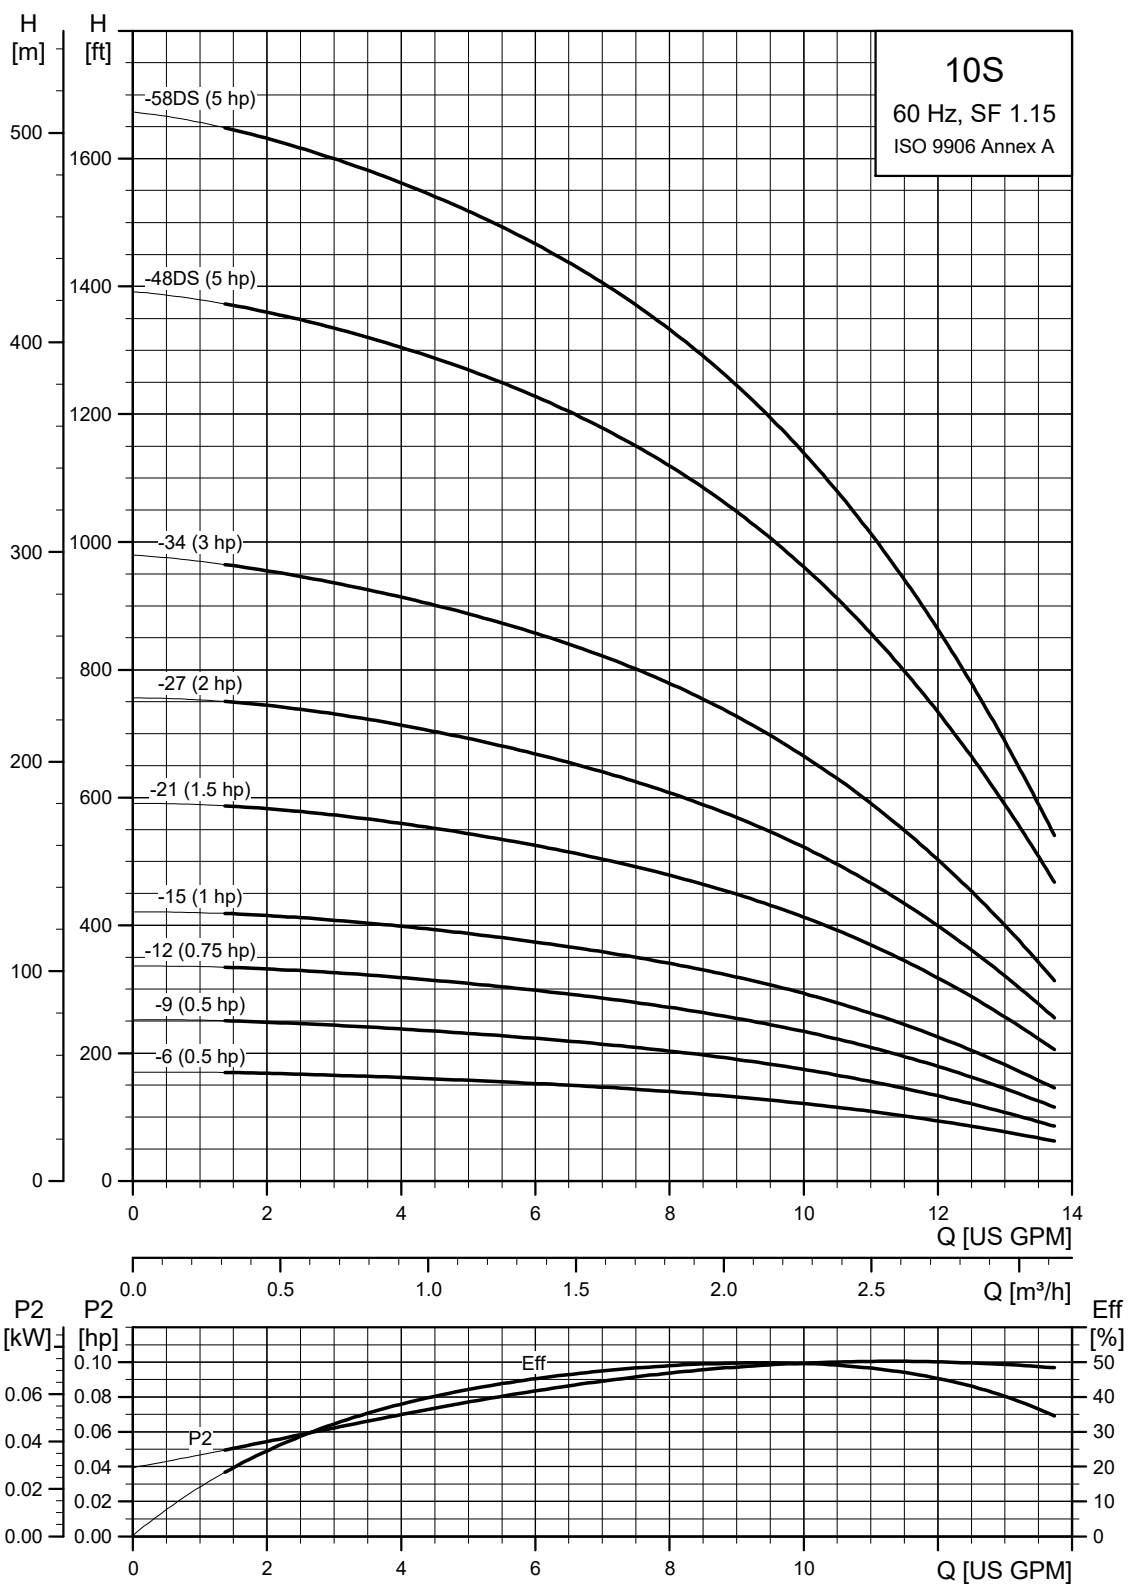


TM05 0230 1812

4" and larger wells - continued

SP 10S (10 gpm) / 4 inch motor

Pump model	Nom. head [ft]	Ph	Volts [V]	Motor [Hp]	Dimensions					Net weight (complete) [lb]
					A	B	C	D	E	
					[in. (mm)]	[in. (mm)]	[in. (mm)]	[in. (mm)]	[in. (mm)]	
10S, motor dia. 4 inch, 2 wire motor, 60 Hz - rated flow 10 gpm (1.25" NPT)										
10S05-6	116	1	230	.5 ■	22.05 (560)	10.99 (279)	11.07 (281)	3.74 (95)	3.98 (101)	20.7
10S05-9	174	1	115	.5 ■	24.53 (623)	10.99 (279)	13.55 (344)	3.74 (95)	3.98 (101)	24.3
			230	.5 ■	24.53 (623)	10.99 (279)	13.55 (344)	3.74 (95)	3.98 (101)	23.4
10S07-12	233	1	230	.75 ■	27.60 (701)	11.58 (294)	16.03 (407)	3.74 (95)	3.98 (101)	24.3
10S10-15	291	1	230	1 ■	30.67 (779)	12.17 (309)	18.51 (470)	3.74 (95)	3.98 (101)	29.7
10S15-21	407	1	230	1.5 ■	37.17 (944)	13.71 (348)	23.47 (596)	3.74 (95)	3.98 (101)	35.1
10S, motor dia. 4 inch, 3 wire motor, 60 Hz - rated flow 10 gpm (1.25" NPT)										
10S05-6	116	1	230	.5 ■	24.77 (629)	13.71 (348)	11.07 (281)	3.74 (95)	3.98 (101)	21.6
10S05-9	174	1	115	.5 ■	24.53 (623)	10.99 (279)	13.55 (344)	3.74 (95)	3.98 (101)	25.4
			230	.5 ■	24.53 (623)	10.99 (279)	13.55 (344)	3.74 (95)	3.98 (101)	24.3
10S07-12	233	1	230	.75 ■	27.60 (701)	11.58 (294)	16.03 (407)	3.74 (95)	3.98 (101)	28.8
10S10-15	291	1	230	1 ■	30.67 (779)	12.17 (309)	18.51 (470)	3.74 (95)	3.98 (101)	29.7
10S15-21	407	3	230	1.5 ■	35.63 (905)	12.17 (309)	23.47 (596)	3.74 (95)	3.98 (101)	32.4
			460	1.5 ■	35.63 (905)	12.17 (309)	23.47 (596)	3.74 (95)	3.98 (101)	36.0
			1	230	2 ●	47.92 (1217)	19.49 (495)	28.43 (722)	3.74 (95)	3.98 (101)
10S20-27	524	3	230	2 ■	42.13 (1070)	13.71 (348)	28.43 (722)	3.74 (95)	3.98 (101)	44.1
			460	2 ■	42.13 (1070)	13.71 (348)	28.43 (722)	3.74 (95)	3.98 (101)	44.1
			1	230	3 ●	58.59 (1488)	22.6 (574)	35.99 (914)	3.74 (95)	3.98 (101)
10S30-34	659	3	230	3 ●	53.98 (1371)	18.00 (457)	35.99 (914)	3.74 (95)	3.98 (101)	74.7
			460	3 ●	53.98 (1371)	18.00 (457)	35.99 (914)	3.74 (95)	3.98 (101)	74.7
			1	230	5 ●	74.18 (1884)	26.62 (676)	47.56 (1208)	3.74 (95)	4.25 (108)
10S50-48DS	931	3	230	5 ●	70.16 (1782)	22.60 (574)	47.56 (1208)	3.74 (95)	4.25 (108)	103.5
			460	5 ●	70.16 (1782)	22.60 (574)	47.56 (1208)	3.74 (95)	4.25 (108)	103.5
			1	230	5 ●	89.49 (2272)	26.62 (676)	62.88 (1597)	3.74 (95)	4.25 (108)
10S50-58DS	1124	3	230	5 ●	85.48 (2171)	22.60 (574)	62.88 (1597)	3.74 (95)	4.25 (108)	132.3
			460	5 ●	85.48 (2171)	22.60 (574)	62.88 (1597)	3.74 (95)	4.25 (108)	132.3

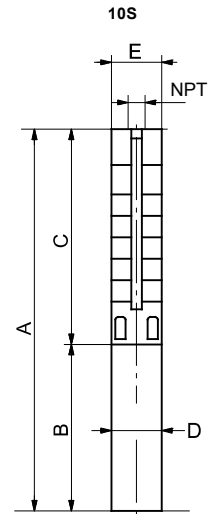

E = Maximum diameter of pump including cable guard and motor.

TN05 02/04 07/11

Notes:

Control box is required for 3-wire, single-phase applications. Data does not include control box.

DS designation = Built into sleeve, 1 - 1/2" NPT, 6" minimum well diameter.

Performance conforms to ISO 9906: 1999 (E) Annex A. Minimum submergence is 2 feet.

- MS 402 motor.
- MS 4000 motor.