
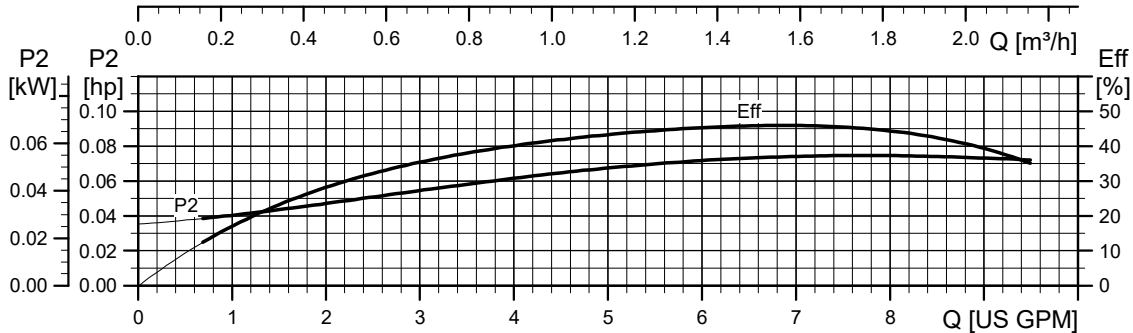


### 4" and larger wells - continued SP 7S (7 gpm)

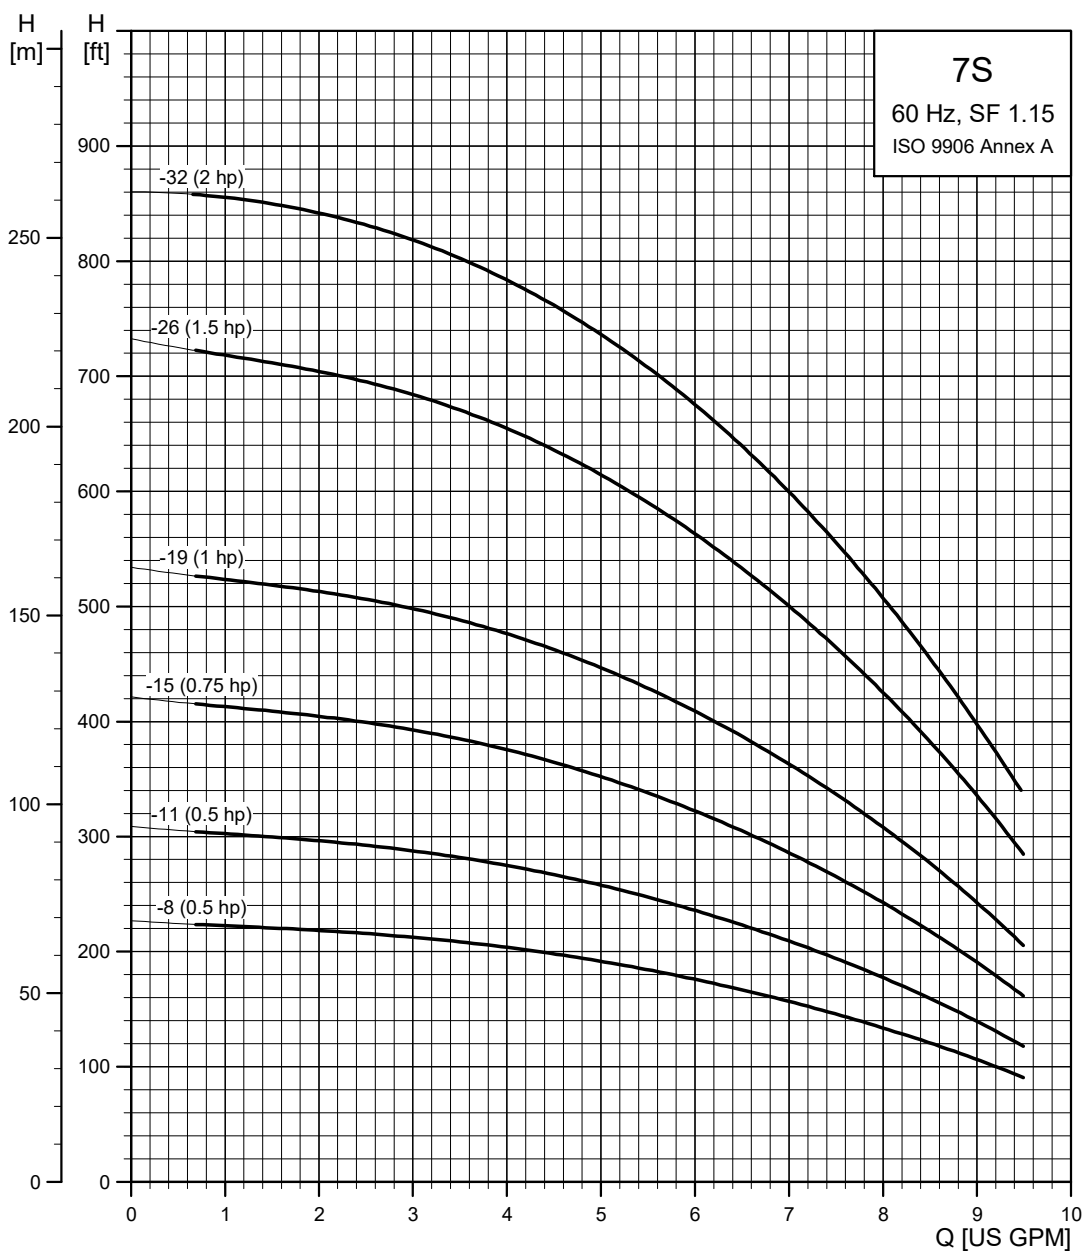


TM05 0982 2112

## 4" and larger wells - continued

### SP 7S (7 gpm) / 4 inch motor

Pump model	Nom. head [ft]	Ph	Volts [V]	Motor [Hp]	Dimensions					Net weight (complete) [lb]		
					A [in. (mm)]	B [in. (mm)]	C [in. (mm)]	D [in. (mm)]	E [in. (mm)]			
<b>7S, motor dia. 4 inch, 2 wire motor, 60 Hz - rated flow 7 gpm (1" NPT)</b>												
7S05-8	151	1	230	.5	■	23.75 (603)	11.03 (280)	12.72 (323)	3.74 (95)	3.98 (101)	21.6	
7S05-11	208	1	115	.5	■	26.23 (666)	11.03 (280)	15.20 (386)	3.74 (95)	3.98 (101)	29.7	
			230	.5	■	26.23 (666)	11.03 (280)	15.20 (386)	3.74 (95)	3.98 (101)	24.3	
7S07-15	283	1	230	.75	■	30.12 (765)	11.62 (295)	18.51 (470)	3.74 (95)	3.98 (101)	29.7	
7S10-19	358	1	230	1	■	34.02 (864)	12.21 (310)	21.82 (554)	3.74 (95)	3.98 (101)	32.4	
7S15-26	491	1	230	1.5	■	41.3 (1049)	13.71 (348)	27.60 (701)	3.74 (95)	3.98 (101)	41.4	
<b>7S, motor dia. 4 inch, 3 wire motor, 60 Hz - rated flow 7 gpm (1" NPT)</b>												
7S05-8	151	1	230	.5	■	23.75 (603)	11.03 (280)	12.72 (323)	3.74 (95)	3.98 (101)	21.6	
7S05-11	208	1	115	.5	■	26.23 (666)	11.03 (280)	15.20 (386)	3.74 (95)	3.98 (101)	21.6	
			230	.5	■	26.23 (666)	11.03 (280)	15.20 (386)	3.74 (95)	3.98 (101)	30.6	
7S07-15	283	1	230	.75	■	30.12 (765)	11.62 (295)	18.51 (470)	3.74 (95)	3.98 (101)	27.9	
7S10-19	358	1	230	1	■	34.02 (864)	12.21 (310)	21.82 (554)	3.74 (95)	3.98 (101)	39.6	
7S15-26	491	3	1	230	1.5	■	41.30 (1049)	13.71 (348)	27.60 (701)	3.74 (95)	3.98 (101)	38.7
			230	1.5	■	39.81 (1011)	12.21 (310)	27.60 (701)	3.74 (95)	3.98 (101)	38.7	
			460	1.5	■	39.81 (1011)	12.21 (310)	27.60 (701)	3.74 (95)	3.98 (101)	38.7	
7S20-32	604	3	1	230	2	●	52.05 (1322)	19.49 (495)	32.56 (827)	3.74 (95)	3.98 (101)	48.5
			230	2	■	46.26 (1175)	13.71 (348)	32.56 (827)	3.74 (95)	3.98 (101)	48.5	
			460	2	■	46.26 (1175)	13.71 (348)	32.56 (827)	3.74 (95)	3.98 (101)	48.5	

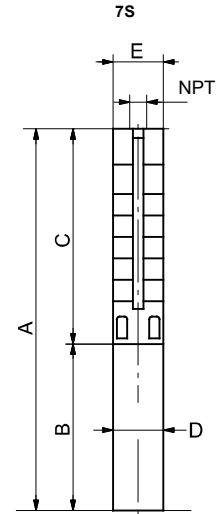

**E = Maximum diameter of pump including cable guard and motor.**

TN05 0204 0711

#### Notes:

Control box is required for 3-wire, single-phase applications. Data does not include control box.

DS designation = Built into sleeve, 1 - 1/2" NPT, 6" minimum well diameter.

Performance conforms to ISO 9906. 1999 (E) Annex A. Minimum submergence is 2 feet.

- MS 402 motor.
- MS 4000 motor.